


HSD128A Instruction Manual

FUNCTIONS

- LCD display time, date, and temperature.
- Projective display by 180° rotating head.
- Either 12-hour or 24-hour format display
- Either C° or F° temperature display.
- 3 sets snooze alarm function
- Birthday celebration alarm
- Countdown function and Stopwatch function
- 16 famous song alarm.
- LED Backlight is available
- Calendar of any year between 2000 and 2099 inquiry.

BUTTONS INDICATION

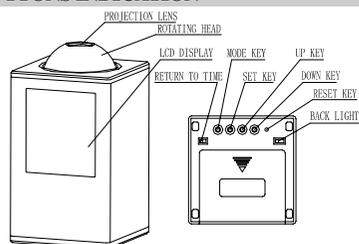

INSTRUCTIONS

BATTERY INSTALLATION

- Open the battery cover, insert 3pcs x "AA" batteries according to the polarity sign. If the installation is

correct, it will check automatically, and shows 12:00 a.m., Jan.1st 2008, and 25 C° on display, and with 'BIBI' sound. Otherwise, replace some new batteries.

D/C ADAPTER USAGE

- Insert the adapter(not included) into the socket for D/C power, which located on the back of unit, well then it is supplied by D/C power.
- LCD Backlight and projective Clock will be always ON by D/C adapter supplied.

Notice:

- The output of adapter is stable direct current 5V.
- If no batteries into the battery compartment during exchange D/C adapter, time / date need to be re-set.

PROJECTIVE FUNCTION

- Slide "backlight ON/OFF/TR" switch to 'ON' position, the backlight will be always 'ON'. The projective clock will be 'ON' for 10 seconds and then 'OFF'.
- Slide "backlight ON/OFF/TR" switch to 'OFF' position, the backlight will be "OFF", but the projective clock will be "ON" 10 seconds by pressing rotated head, and then turn OFF.
- Slide "backlight ON/OFF/TR" switch to 'TR' position, backlight and projective clock will be in "STAND BY" mode. Backlight and projective clock will be ON 10 seconds by pressing rotating head, and then turn OFF.

Notice:

- Projective time display will be rotated 180° by

pressing "DOWN" key.

- Suggest to keep at 'TR' mode if it operates by batteries (not adapter) for saving battery power.

CONTROL DISPLAY

- Slide "Time ON/OFF" switch to 'ON' position, LCD display will go back to 'Time Display' after 10 seconds whatever you set at other displays.
- Slide "Time ON/OFF" switch to 'OFF' position, LCD display will maintain to the display which you set.

DISPLAY MODE

- Projective Clock will be shown same as LCD display except no Day Date and symbols shown.
- Slide 'Time ON/OFF' switch to ON position, press 'UP' key 1 time, it will display by turn:
TIME→TEMPERATURE→YEAR→MONTH AND DAY

ENQUIRY AND SETTING

- At the normal time display state, each press 'MODE' key or Rotated head, it will display by turn:
TIME→TEMPERATURE→YEAR→MONTH AND DAY.
→ALARM1→ALARM2→ALARM 3→BIRTHDAY
CELEBRATION→COUNTDOWN. STOPWATCH
- At the normal state of time interface, press and hold 'SET' key 3 seconds to enter to Setting mode. The display numbers on time display will be blinking, press "UP" or "DOWN" keys to set numbers. When the setting is finished, press "SET" key to save your setting. Repeat the above procedures to set other function circular.
- At the state of setting, press and hold "UP" or

"DOWN" keys3 seconds into quick setting.

- At the state of setting, press "MODE" key to save and turn back next inquiry setting.

TIME SETTING

- At the state of time interface, press and hold "SET" key 3 seconds to enter to setting mode. '12/24 hour' display is blinking, press "UP" or "DOWN" keys to set 12 or 24 hours display.
- Press "SET" key enter to hour setting mode, 'Hour' Display is blinking, press "UP" or "DOWN" keys to set hour time.
- Press "SET" key enter to minute setting mode, 'Minute' display is blinking, press "UP" or "DOWN"
- keys to set minute time.
- Press 'SET' key to save your setting.

TEMPERATURE SETTING

- At the state of temperature interface, press "SET" key to set C° or F° selections.

CALENDAR SETTING

- At the state of year interface, press and hold "SET" key 3 seconds to enter to setting mode. 'Year' display are blinking, press "UP" or "DOWN" keys to set year.
- Press "SET" key enter to 'M, D' mode. 'M, D' means "Month, Date" display, press "UP" or "DOWN" keys to set either "Month, Date" display or "Date, Month" display.
- Press "SET" key enter to month setting mode, 'Month'

- Display is blinking, press “UP” or “DOWN” keys to set month.
- Press “SET” key enter to date setting mode, ‘DATE’ Display is blinking, press “UP” or “DOWN” keys to set date.
- Press ‘SET’ key to save your setting.

ALARM SETTING

- At the state of “🔔” interface, corresponding alarm symbol “🔔” is blinking, press “UP” or “DOWN” keys to choose the alarm song, press “SET” key to turn ON or turn OFF currently alarm function, After turn OFF the alarm function, display shows “--:--”; Otherwise, display shows currently alarm time.
- Press and hold “SET” key 3 seconds to enter into alarm setting mode. ‘Hour’ display is blinking, press “UP” or “DOWN” keys to set desire hour time.
- Press “SET” key enter to minute setting mode, ‘Minute’ display is blinking, press “UP” or “DOWN” keys to set desire minute time. After finished alarm setting, press “SET” key return to currently display interface.
- Setting Alarm 2 and Alarm 3, press “MODE” key or rotated head to select alarm 2 symbol “🔔” or alarm 3 symbol “🔔”, repeat the above “alarm setting steps” to set alarm 2 and alarm 3.
- At the state of time interface, if there is a alarm Symbols, this means alarm function is ON. Otherwise, this alarm clock symbol is not displayed.
- At the state of time interface, if there is a alarm Symbol “🔔”, this means alarm 2 function is turn

ON.

- When it reaches the alarm time, it will sound the alarm music last for 60 seconds.
- Press ‘Mode’ Key or ‘Rotated Head’ to turn OFF the alarm sound.

SNOOZE ON/OFF

- At the state of time interface and alarm is ON ,if there is a snooze symbol “🔔”, this means snooze function is turn ON.
- Press and hold “UP” key for 3 seconds to turn OFF or ON snooze function.
- If Alarm function is OFF, snooze is no function.
- When it reaches the snooze function, the will sound the alarm music every 5 minutes and 3 times totally.
- Press ‘Mode’ Key or ‘Rotated Head’ to turn OFF the snooze alarm sound.

BIRTHDAY AND CELEBRATION SETTING

- At the state of birthday and celebration interface, the symbol “🎂” is blinking. press “SET” key to turn ON or turn OFF currently birthday and celebration function, After turn OFF the alarm function, display shows “--:--”; Otherwise, display shows currently birthday and celebration.
- Press and hold “SET” key 3 seconds to enter into the setting mode. ‘Year’ display is blinking, press “UP” or “DOWN” keys to set desire Year time.
- Press “SET” key enter to month setting mode, ‘Month’ Display is blinking, press “UP” or “DOWN” keys to

set month.

- Press “SET” key enter to date setting mode, ‘DATE’ Display is blinking, press “UP” or “DOWN” keys to set date.
- Press “SET” key enter to hour setting mode, ‘HOUR’ display is blinking, press “UP” or “DOWN” keys to set hour time.
- Press “SET” key enter to minute setting mode, ‘MINUTE’ display is blinking, press “UP” or “DOWN” keys to set minute time.
- Press ‘SET’ key to save your setting.
- At the state of time interface ,if there is a birthday and celebration symbol “🎂”, this means the function is turn ON. When it reaches the time, it will sound the birthday song last for 60 seconds. .Press ‘Mode’ Key or ‘Rotated Head’ to turn OFF the Birthday and Celebration song.

COUNTDOWN FUNCTION

- At the state of countdown interface, the symbol “⌚” is blinking. Press and hold “SET” key 3 seconds to enter into the setting mode. ‘Minute’ display is blinking, press “UP” or “DOWN” keys to set desire minute time. Press “SET” key again to enter to second setting mode, ‘Second’ Display is blinking, press “UP” or “DOWN” keys to set second time.
- Press ‘SET’ key to save your setting, and start to countdown. Press ‘SET’ key again to pause the countdown.
- Countdown function can be set from 1 second to 99 minutes and 59 seconds. When it finish the countdown,

it will sound the alarm ‘Bi Bi’ last for 60 seconds.

- Press ‘Mode’ key or ‘Rotated Head’ to stop the alarm sound.
- At the state of stop/pause countdown mode, press and hold ‘Up’ or ‘Down’ key for 3 seconds to pre-set the countdown time to Zero.
- At the state of stopwatch interface, the symbol “⌚” is blinking.
- Press “SET” key to start the stopwatch function.
- Press ‘SET’ key again to pause the stopwatch function.
- Stopwatch function can be set from 0 second to 99 minutes and 59 seconds, and then repeat.
- Press and hold ‘Up’ or ‘Down’ key for 3 seconds to pre-set the stopwatch function to Zero.

Note:

- At the normal state of time interface, “⌚” is blinking when either countdown or stopwatch function is ON. Otherwise, the countdown or stopwatch function is OFF.

ATTENTION

1. If there are any phenomena of low alarm sound, paucity, blurry time display, no color, light or dark light, please replace new batteries.
2. Due to save the battery power, please don’t turn on the color light and display projection for a long time unless adapter used.
3. At any abnormal phenomenon, please press “reset” to turn it on again.
4. At any abnormal state, please get the professional help or contact our company.

© 2007 Design Registration Pending

编写:

排版:

翻译:

审核:

批准: